



## Circular pneumatic nozzle sets

With hose connector  
With all necessary pneumatic air components

For commercial vehicles with single exhaust pipes

A pneumatic nozzle set contains a nozzle with a 45° bend hose connector and all necessary pneumatic air components (including a pressure reduction valve and a 10-meter Teflon air tube) for connection to a normal compressed air installation. Nozzle sets can be adapted to most types of exhaust gas extraction installations e.g. hose reels and rail systems.

Your company name and logo can be stamped into the nozzle without extra costs.

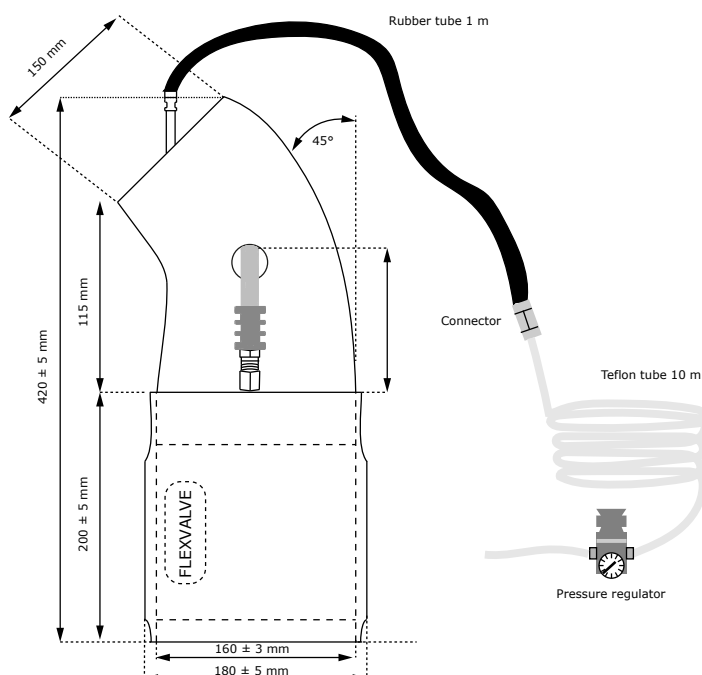

All sleeves close from  
3 sides in a triangle

PRODUCT NO.	NOZZLE DIAMETER (MM)	HOSE CONNECTOR DIAMETER (MM)	EXHAUST PIPE SIZE	MAX. TEMPERATURE
250101	ø100	4" (101 mm)	ø20 / ø90	+150°C
250125	ø125	4" (101 mm)	ø30 / ø120	+150°C
250126	ø125	5" (126 mm)	ø30 / ø120	+150°C
250160	ø160	4" (101 mm)	ø50 / ø150	+150°C
250161	ø160	5" (126 mm)	ø50 / ø150	+150°C
250162	ø160	6" (151 mm)	ø50 / ø150	+150°C

### Circular pneumatic nozzle sets with a Kevlar lining

PRODUCT NO.	NOZZLE DIAMETER (MM)	HOSE CONNECTOR DIAMETER (MM)	EXHAUST PIPE SIZE	MAX. TEMPERATURE
252101	ø100	4" (101 mm)	ø20 / ø90	+200°C
252125	ø125	4" (101 mm)	ø30 / ø120	+200°C
252126	ø125	5" (126 mm)	ø30 / ø120	+200°C
252160	ø160	4" (101 mm)	ø50 / ø150	+200°C
252161	ø160	5" (126 mm)	ø50 / ø150	+200°C
252162	ø160	6" (151 mm)	ø50 / ø150	+200°C