

Oval pneumatic nozzles 200/100 mm - 4" hose connector

Compressed air activation
With 4" hose connector

Single and double exhaust pipes on
private cars and commercial vehicles

The oval nozzle is made for compressed air activation, and is ideal for exhaust gas extraction from car repair shops, vehicle inspection garages and fire stations etc. The nozzle can be used for single and double exhaust pipes.


The most common sizes are 150/80 mm and 200/100 mm but other diameters are available upon request. The nozzle can be activated by hand pump which is not included.

Your company name and logo can be stamped into the nozzle without extra costs.





45° bend hose connector



Straight hose connector

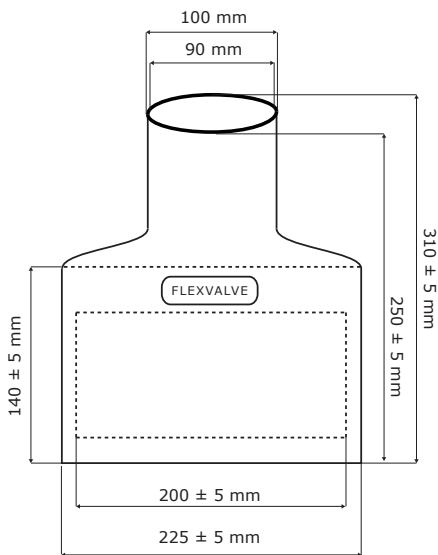

200/100 1 side

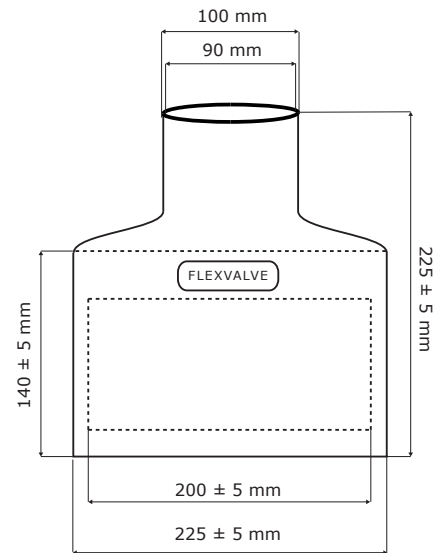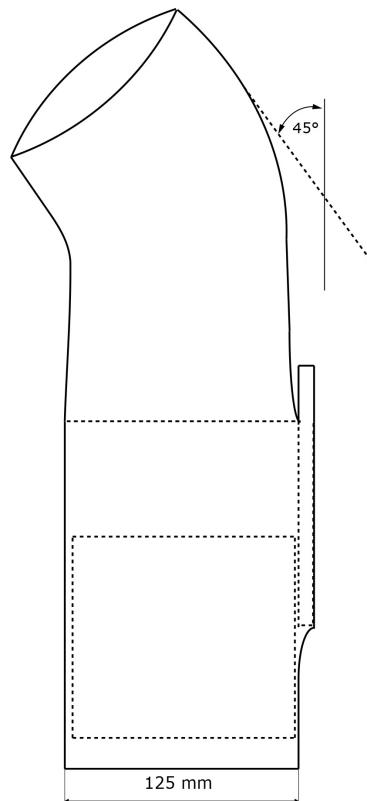

200/100 2 sides

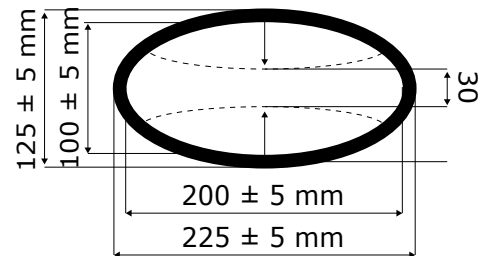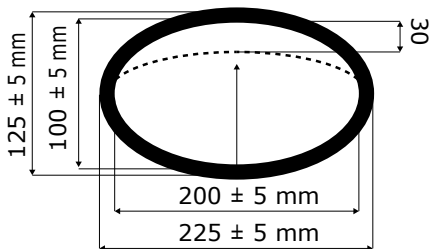

PRODUCT NO.	NOZZLE SIZE (MM)	NOZZLE EXPANSION	HOSE CONNECTOR	EXHAUST PIPE SIZE	OPERATION PRESSURE	MAX. TEMPERATURE
226203	200 / 100	1 side	Straight	ø30 / ø125	0.6 bar	+150°C
226204	200 / 100	2 sides	Straight	ø20 / ø125	1.0 bar	+150°C
226213	200 / 100	1 side	45° bend	ø30 / ø125	0.6 bar	+150°C
226214	200 / 100	2 sides	45° bend	ø20 / ø125	1.0 bar	+150°C