

Oval pneumatic sleeves with Kevlar lining

Compressed air activation
Without hose connector





Single and double exhaust pipes on
fire engines, rescue vehicles etc.

The oval sleeve with Kevlar is made for compressed air activation, and is ideal for exhaust gas extraction from fire engines, rescue vehicles and vehicle inspection garages etc.
The sleeve can be used for single and double exhaust pipes.

The most common sizes are 150/80 mm and 200/100 mm but other diameters are available upon request.

Kevlar lining inside reduces friction and resists extra high gas temperatures.

Your company name and logo can be stamped into the sleeve without extra costs.

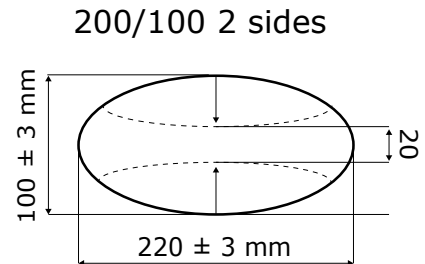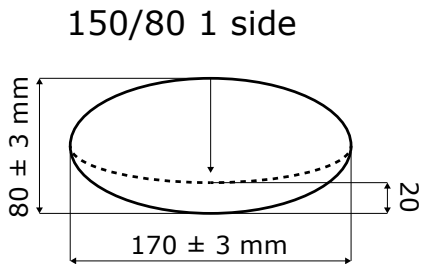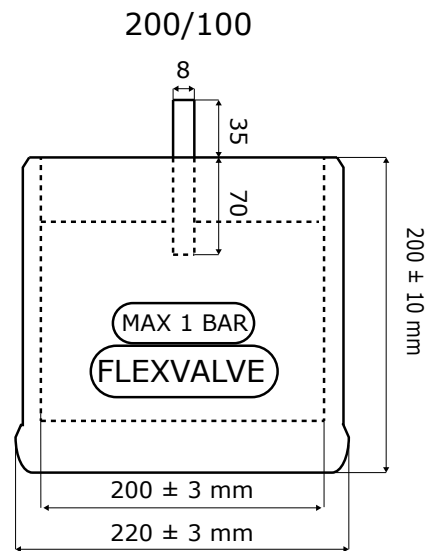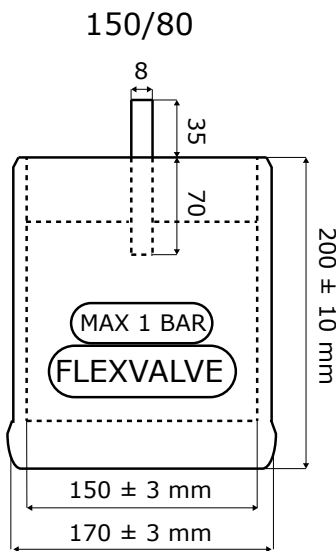

PRODUCT NO.	SLEEVE SIZE (MM)	SLEEVE EXPANSION	SLEEVE LINING	EXHAUST PIPE SIZE	WEIGHT (GRAM)	MAX. TEMPERATURE
222127	150/80	1 side	Kevlar	Ø20 / Ø100	680	+200°C
222128	150/80	2 sides	Kevlar	Ø10 / Ø100	680	+200°C
222161	200/100	1 side	Kevlar	Ø30 / Ø125	1080	+200°C
222162	200/100	2 sides	Kevlar	Ø20 / Ø125	1080	+200°C