

Circular pneumatic sleeves with Carbon fibre

Compressed air activation
Without hose connector







Single exhaust pipes on personal cars,
busses and emergency vehicles etc.

The circular sleeve is made for compressed air activation, and is ideal for exhaust gas extraction from car repair shops, vehicle inspection garages and fire stations etc.

The most common sizes are $\varnothing 125$ and $\varnothing 160$ but other diameters e.g. $\varnothing 200$ and $\varnothing 250$ are available upon request.

Carbon fibre lining inside and outside reduces friction and resists extra high gas temperature.

Your company name and logo can be stamped into the sleeve without extra costs.

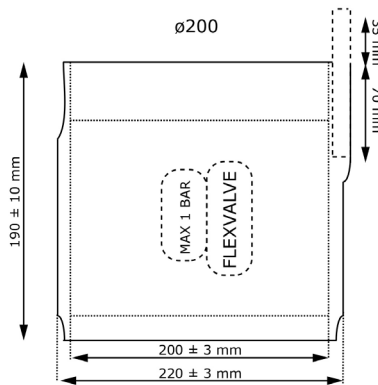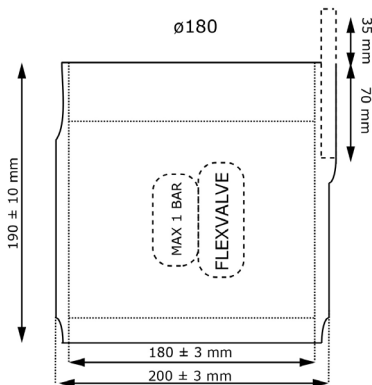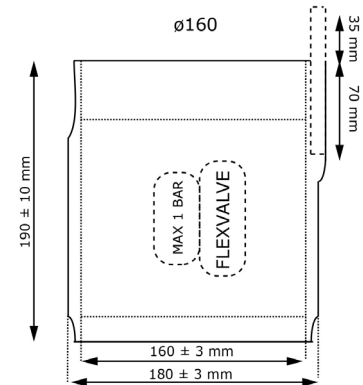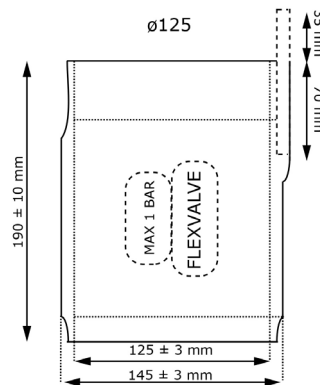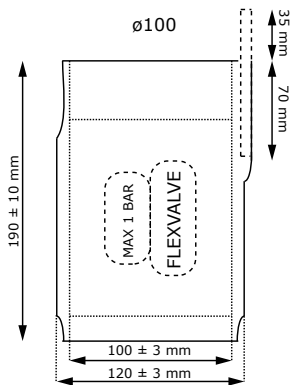

All sleeves close from
3 sides in a triangle

PRODUCT NO.	SLEEVE DIAMETER	SLEEVE LINING	OPERATION PRESSURE	EXHAUST PIPE SIZE	WEIGHT (GRAM)	MAX. TEMPERATURE
212100	100 mm	Carbon in + out	1.0 bar	$\varnothing 20 / \varnothing 90$	720	+300°C
212125	125 mm	Carbon in + out	1.0 bar	$\varnothing 30 / \varnothing 110$	870	+300°C
212160	160 mm	Carbon in + out	1.0 bar	$\varnothing 50 / \varnothing 150$	970	+300°C
212180	180 mm	Carbon in + out	1.0 bar	$\varnothing 60 / \varnothing 170$	1220	+300°C
212200	200 mm	Carbon in + out	1.0 bar	$\varnothing 60 / \varnothing 170$	1520	+300°C